


Your international partner  
[www.trexrubber.com](http://www.trexrubber.com)



## SECONDARY SCRAPER FTK-REX



Belt Width	Scraping Width
500 mm	450 mm
650 mm	550 mm
800 mm	660 mm
1 000 mm	880 mm
1 200 mm	990 mm
1 400 mm	1 210 mm

## T-REX Belt Cleaning



*FTK-REX Secondary Scraper: Medium Duty Scraper | Galvanized Steel | Hard-Metal Scraper Blades*

Optional:


**Spring Tensioning Unit** (set = 2 pcs.)

Belt Width:

< 500 mm

650 - 800 mm

> 1 000 mm

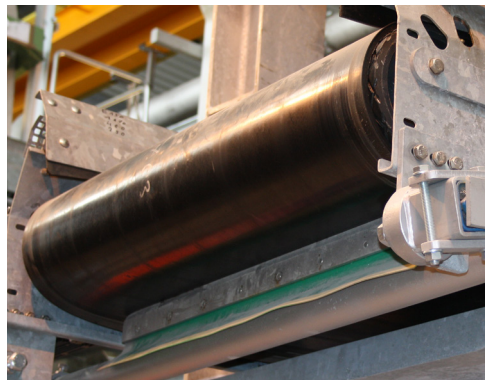

- ✓ Optional Tensioning Unit
- ✓ Does not damage the Conveyor Belt
- ✓ Easy to Install